


Technical Specifications

# Acoustic Absorption Foam

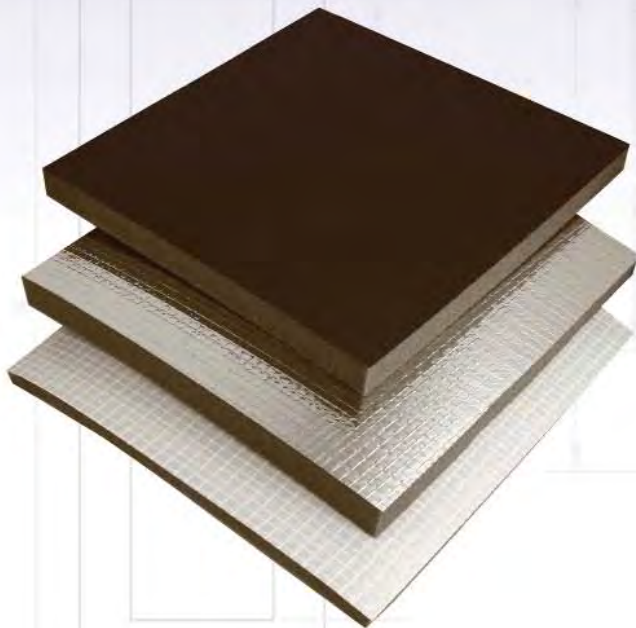

## Applications

- Machinery enclosures
- Office equipment
- Medical equipment
- Cars, buses and specialty vehicles
- Sound attenuated enclosures
- Appliances

## Advantages

- High NRC values
- Economical
- Flexible for easy installation
- Light weight
- Available in sheets, rolls, or as precut kits


SOUNDOWN offers the highest quality acoustical foam products available today. Our Acoustic Absorption Foam is an open cell acoustical grade polyether designed to have excellent acoustic properties in an easily handled and durable format. Available in a range of standard thicknesses up to 3" with options for a number of different facings as well as pressure sensitive adhesive, Soundown can provide a product suitable for most any application. (Specialty foam and fibrous materials are available in cases where Soundown foam products are not applicable.)

Soundown Acoustic Absorption Foams are manufactured using a polyether formulation for increased durability. Polyether foams have a high degree of hydrolytic stability, allowing for a long service life even in high humidity or occasionally wetted areas. This level of durability makes Soundown Acoustic Absorption Foams an excellent choice for applications such as off and over road equipment or vehicles as well as generator, pump, and compressor enclosures.


Soundown Acoustic Absorption Foams are available laminated with either a white or metalized polyester rip-stop facing or urethane film. These facing materials provide a vapor barrier to protect the insulation as well as provide a durable and aesthetically pleasing surface. Pressure Sensitive Adhesive (PSA) is also available for ease of installation.

Soundown's Acoustic Absorption Foams come in a variety of thickness to facilitate use in a wide range of applications. Our materials range from 1/4" to 3" thick, offering a high level of sound energy absorption. Acoustic insulation materials work by two processes: absorption of sound energy, which dissipates sound as low level heat, and reflection, which reflects noise away from a location where quieting is desired. The effectiveness of an absorptive material increases directly with thickness, in both the amount of energy absorbed and the range of frequencies over which absorption occurs (See fig. 1A). Bass frequencies require thicker absorptive layers. For engine noise 1/2" is generally a minimum useful thickness while 1" is good and 1.5" to 3" approaches the optimum with the practical considerations of effectiveness and space available.


## Facing Options

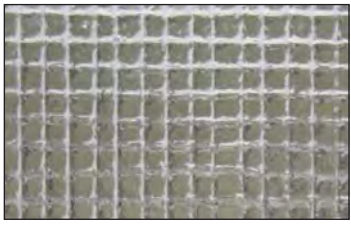

Aluminized Ripstop Facing

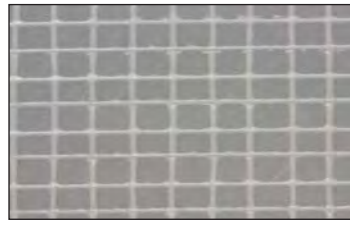

White Ripstop Facing

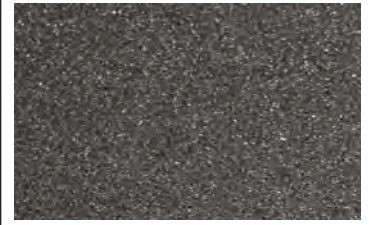

Black Urethane Facing

## Typical Physical Properties

### The Material

Soundown's Acoustic Foam is produced on 56" (1.37m) wide master rolls. Sheet goods are trimmed to 54" wide and come in a variety of lengths, which vary by product.

### Thickness

### Surface Density

0.5" (12mm)	.07 lb/ft <sup>2</sup> (0.342kg/M <sup>2</sup> )
1.0" (25mm)	.14 lb/ft <sup>2</sup> (0.684kg/M <sup>2</sup> )
1.5" (38mm)	.21 lb/ft <sup>2</sup> (1.027kg/M <sup>2</sup> )
2.0" (50mm)	.28 lb/ft <sup>2</sup> (1.956kg/M <sup>2</sup> )

	Polyether Foam
Resilience (Ball Rebound)	45% to 60 %
Load Bearing Range (@ 25% Compression)	0.20 to 0.45 pal
Hydrosis Resistance (Activation Energy)	Excellent 32,000 cal/mole
Oxidation Resistance	Excellent
Resistance to Air Flow (1/2" H2O Pressure Drop)	2 to 5 cfm
"K" Factor	0.25 to 0.30
Noise Reduction Coefficient	0.07 to 0.85
Tensile Strength	14 to 20 psi
Elongation	150% to 250%
Tear Resistance	1.5 to 3.0 ppi
Compression Set (@50% deflection) (@90% deflection)	Max. 10% Max. 20%
Solvent Resistance	Moderate Swelling (Recovers on Drying)
Water Absorption	Hydrophobic
Flammability	UL 94 HF 1
Temperature range (continuous operation)	-40F (-40C) to 200F (93C)

## Acoustic Performance

Average Sound Absorption Coefficient at Normal Incidence		
Frequency	.500" thick	1.0" thick
125 Hz	0.05	0.07
250 Hz	0.07	0.12
500 Hz	0.15	0.28
1000 Hz	0.24	0.60
1600 Hz	0.37	0.80
2000 Hz	0.50	0.93
3150 Hz	0.73	0.85
4000 Hz	0.88	0.83
6300 Hz	0.80	0.85

\*Absorption values for un-faced materials

16 Broadway  
Salem, MA 01970  
1-978-745-7000  
www.SOUNDOWN.com



3005 S.W. 2nd Ave. #102  
Fort Lauderdale, FL 33315  
1-954-761-9188  
sales@soundown.com

2011.1.D