



Technical Specifications Vinyl/Foam Insulation

ENGINE

SERVICE CHANNEL

SOUND SHIELD

DUAL-LIFT (0,066m)

Enclosure Bulkhead
Wood, fiberglass, or metal.

Absorption Layer


Absorbs reverberating sound in the machinery space by filtering sound waves through fine porous foam or fiberglass.

**Barrier Layer
Decoupler Layer**

The combination of the barrier and the decoupler layer covered by a thin attractive vapor barrier facing acts as a second wall, in addition to the machinery space enclosure. This wall reflects noise back into the absorption layer.

Film Facing

The attractive easy-to-clean surface protects the absorption material from spills, mists, and vapors.

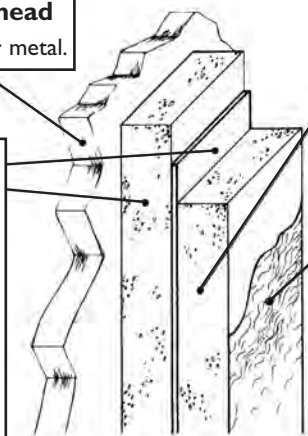


Vinyl Foam Barrier Composite

SOUNDOWN'S Vinyl/Foam composite insulation is an effective treatment for airborne noise that radiates from engines, and other machinery. The standard composite consists of a layer of mass loaded vinyl sandwiched between two layers of polyether fire retardant foam covered by a thin attractive vapor barrier facing. The composite is designed and manufactured specifically for attenuation of sounds from machines such as engines, generators, pumps, and other marine equipment which may have significant base and mid-range frequency components. Our construction centers the acoustic vinyl between equal thicknesses of foam, front and back. This configuration optimizes the mid and bass frequency sound


isolation in comparison to other materials with only a thin foam layer on the backside; solely optimized for "tinier" high-frequency noise.

Vinyl/Foam composite insulation from SOUNDOWN is available in a number of formats for optimal sound attenuation within the available space. Soundown is able to tune this attenuation by utilizing barrier material of 0.5 lb., 1 lb., 1.5 lbs., or 2 lbs. per square foot in our composites. In areas where hatch and bulkhead clearances do not allow the use of thicker composites we may substitute heavier barrier material so that performance is not compromised. Likewise, in weight critical applications, lighter barriers may be used in thicker composites.

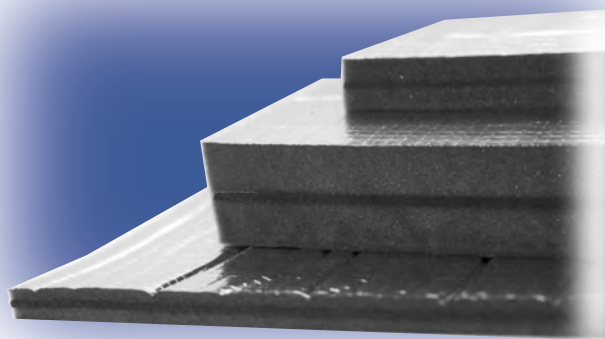

Above: SOUNDOWN manufactures a wide range of insulation to meet specific needs.

Left: SOUNDOWN'S custom cutting reduces labor, scrap and shipping costs. SOUNDOWN technicians work with digital files, drawings and complex patterns.



2010.1.A

DUAL-LIFT (0,123m)

100 (203,2mm) ENGINE EXHAUST PIPE

SOUNDOWN
SOUNDOWN CORP.
171 WEST 50th ST
MILWAUKEE, WI 53219
PHONE: 414-251-1000
FAX: 414-251-1001
DRG BY: R. HEITZ
<http://www.soundown.com>

SOUNDOWN CORPORATION
ACOUSTIC INSULATION DETAIL

SIZE	PART NO.	REV	DATE	DRG NO.
A	IVF1010			1010
SCALE	1:1	DATE	09-14-09	SCALE

THE INFORMATION HEREON IS THE PROPERTY OF SOUNDOWN CORP. ANY COPYING TRANSMITTAL TO OTHERS AND ANY USE EXCEPT THAT FOR WHICH IT WAS PROVIDED IS PROHIBITED WITHOUT THE WRITTEN PERMISSION OF SOUNDOWN CORP.

Barrier Foam Composites

Barrier

.5 lb./ft ²	1 lb./ft ²	1.5 lb./ft ²	2 lb./ft ²
1/16"	1/8"	3/16"	1/4"

Decoupler Layer

Polyether Polyurethane
Flexible Foam-1.6 lb/ft³
220+pores/inch
1/2"-3" thickness available

Absorber Layer

Polyether Polyurethane
Flexible Foam 1.6lb/ft³
220 + pores/inch
1/2"-3" thickness available
1.5 mil Ripstop Mylar Vapor Barrier Facing

Typical Physical Properties

Thickness	1/4" to 4"
Weights (per ft ²)	.55 lbs. to 2.5 lbs.
Flammability, foam UL 94 HF-1 MVSS 302 ISO 4589-3	PASS ----- MEETS MEETS
Specific Gravity (Barrier) ASTM D 798	1.80
Hardness (Barrier) Shore A 2 ASTM D 2240	90 Nominal

Stiffness, MPA (Barrier) ASTM 749	19.60
Tensile, PSI (Barrier) ADSTM D 412	407
Elongation, % (Barrier) ASTM D 412	120
Tear, lbs/1" (Barrier) ASTM D 624	77
Temp Range, Fahrenheit (Composite)	-40 to 255 degrees

Typical Acoustic Properties

Octave Band Center Freq. Hz	Transmission loss of Composite by Weight Per ASTM E90-90		Sound Absorption Per ASTM C 423-84A
	1 lb./ft ²	1.5 lb./ft ²	1" Foam, Mylar Face
125	14	18	.14
250	17	21	.37
500	22	25	.69
1k	28	32	.61
2k	36	37	.79
4k	44	46	.48
STC	28	30	
NRC			.60

* Transmission loss as published by SOUNDOWN and other manufacturers of composite insulation represent a test of the material alone without panel to it might be attached to in service.

All statements herein are expression of opinion that we believe to be accurate and reliable, but are presented without guaranty or responsibility on our part.

16 Broadway
Salem, MA 01970
1-978-745-7000
www.SOUNDOWN.com



3005 S.W. 2nd Ave. #102
Ft. Lauderdale, FL 33315
1-954-761-9188
sales@soundown.com