

DOCUMENTATION SHEET

Propulsion Equipment  
Type Thrust bearing

THRUST BEARING




**General**

Rubber Design has developed a compact range of thrust blocks (or trust bearings) in combination with their flexible marine couplings for high performance operation in ships and yachts.

The advantage of using a thrust block is that the propeller thrust load is not taken by the engine-gearbox, this enables an optimized flexible mounting system of engine-gearbox to be used. This gives the best results for vibration isolation and reduction of structure borne noise from engine-gearbox to the foundation (hull of the ship).

**Specification**

To obtain the best results in the reduction of structure borne noise, the thrust block has a further option to be flexible mounted with a minimum deflection in the longitudinal direction. An advantage of using the flexible marine coupling is that torsional vibrations and noise transmission from the engine-gearbox to the thrust block/propeller shaft will be reduced. The thrust block can be equipped with an additional cooling module to ensure optimum service temperature.

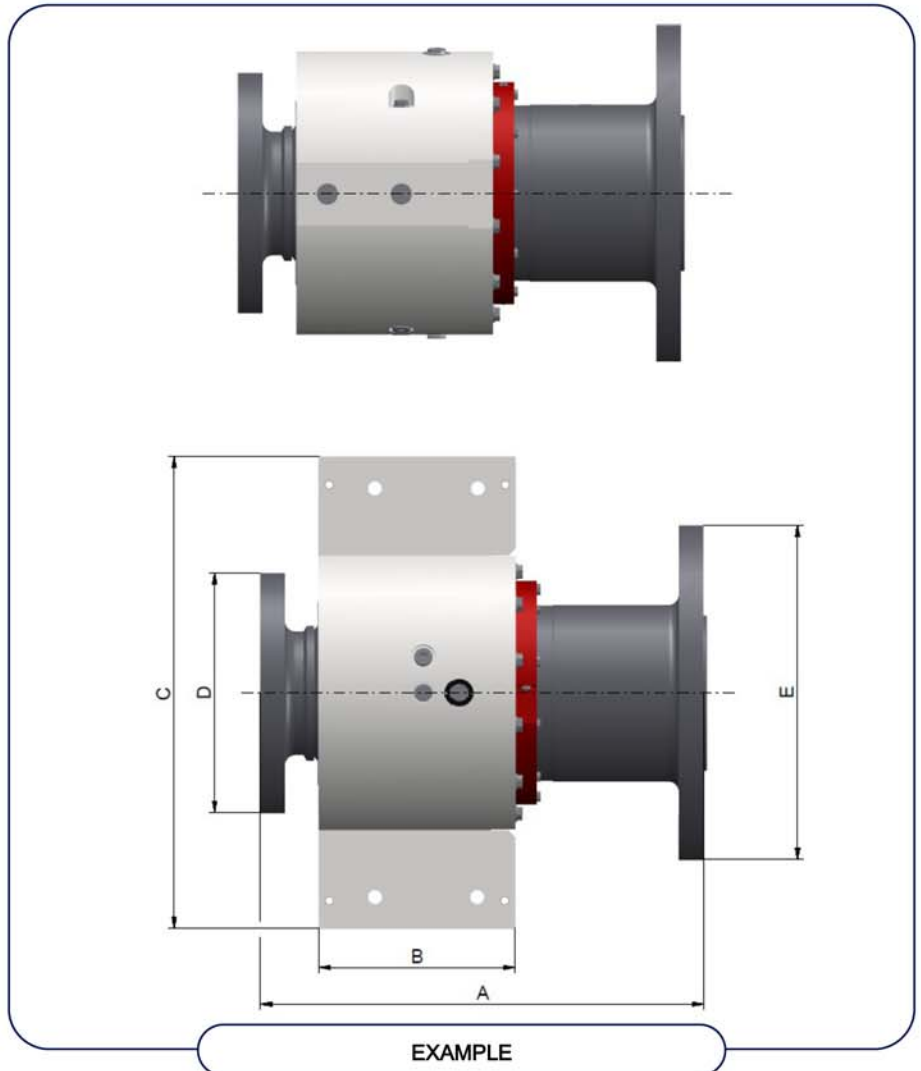



# THRUST BEARING

### Selection

The characteristics table is ideal for initial selection; however, it is advisable to seek expert advice before finalizing an installation design. Rubber Design is eager to support you by making calculations as a service, to ensure a proper functioning system.

|       | Dimensions |        |        |        |                          | Max Thrust load |               |
|-------|------------|--------|--------|--------|--------------------------|-----------------|---------------|
|       | A [mm]     | B [mm] | C [mm] | D [mm] | E [mm]                   | 200 rpm [kN]    | 1200 rpm [kN] |
| SLB 1 | 381        | 186    | 421    | 200    | Depends on coupling size | 70,0            | 40,0          |
| SLB 2 | 464        | 228    | 490    | 235    |                          | 97,5            | 67,5          |
| SLB 3 | 525        | 245    | 580    | 320    |                          | 142,5           | 85,0          |
| SLB 4 | 629        | 279    | 670    | 340    |                          | 192,5           | 112,5         |
| SLB 5 | 710        | 327    | 730    | 390    |                          | 250,0           | 147,5         |
| SLB 6 | 810        | 350    | 820    | 530    |                          | 310,0           | 182,5         |
| SLB 7 | 1080       | 440    | 1060   | 545    |                          | 460,0           | 270,0         |

### CHARACTERISTICS

### Engineering

During assembly the thrust shaft is accurately aligned and fixed with split locking ring before dispatch to the customer.

CAD drawings (2D/3D) of the thrust blocks and flexible marine couplings are available in different formats so that this geometry can be easily imported into the CAD drawing of the complete propeller shaft installation. All thrust blocks and flexible marine couplings can be delivered with the required classification approval.

### Remarks

It is our intention to maintain the excellent standard of our products. Modifications and improvements may be made from time to time and it is therefore advisable to contact us before ordering.



Salem, MA  
p. (978)745-7000

Ft Lauderdale, FL  
p. (954)761-9188

www.soundown.com  
sales@soundown.com